

SHEET METAL TOP on STEEL FRAME,  
This unit to be Removable so as to permit  
Walls to be burnt-off or cleaned.

Butterfly Damper  
to allow for closing  
Operated by chain  
or wire from ground

Exhaust Port  
Opening

3 WALLS to be MASONARY.

The other (4<sup>th</sup> side) to be Steel Framed  
with Slotted Sheet Metal Side allowing  
Filter Frame removal for Recovering  
of Burlap Screens. These screens  
are to be fastened to filter frames  
with Hooks or Pins similar to those  
used on domestic Curtain Stretchers.

Water Spray to act as Primary paint  
Coagulator.

Angle Iron Supports

WATER SPRAY  
recessed into masonry.


FAN AIRDUCT  
from Paint-shop

ACCES DOOR  
to Skim Tank

WATER LEVEL

TO SEWER

SKIM TANK

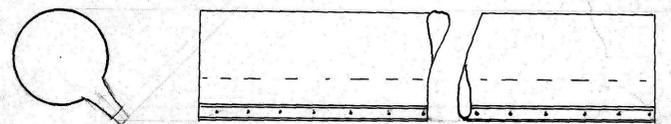

— FILTER TOWER for TAG SHOP —  
— PAINT ROOM —

— DEPARTMENT OF CORRECTIONS —  
— ENGINEERING DIVISION —

Drwg N <sup>o</sup> D.9 - P.323		
DESIGNED H. MOONEY.	1 Mar 1950.	HUNT.