


TENNIS COURT RULES SIGN DESIGN SPECIFICATIONS

- Signs should be made as follows: use .080 thick metal with rounded corners; dimensions should be 18" across x 24" high; reflective green letters and border on a reflective white background; border should be 1/2" wide and 1/2" from the edges; four corner holes drilled 1" from each edge. See below for exact wording of sign.
- The sign should be mounted on the fencing on the latch side of each gate entrance, with the top edge of the sign even with the top of gate entrance. When mounting, ensure that no protrusions are present that could injure someone.

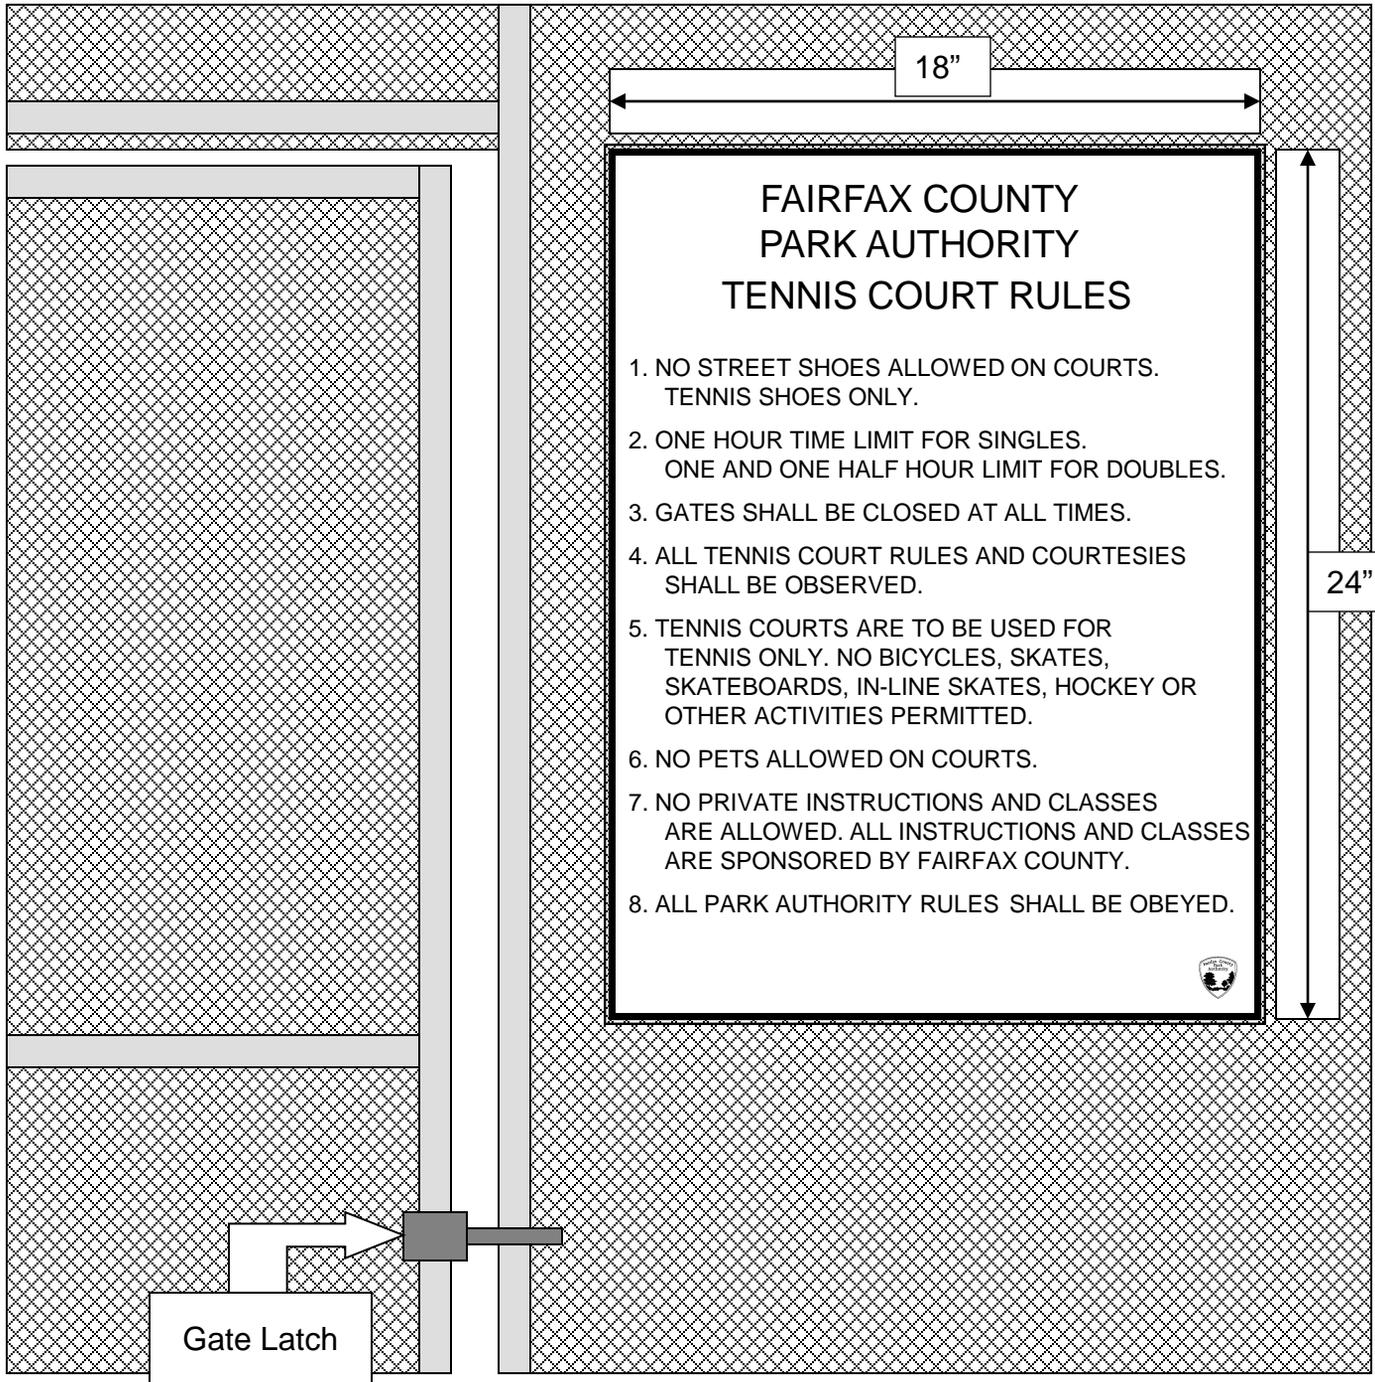

ATHLETIC FIELDS CLOSED DESIGN SPECIFICATIONS

- Athletic field closed sign should be made as follows: use .080 thick metal with rounded corners; dimensions should be 24" across x 18" high; reflective red letters and border on a reflective white background; border should be 1/2" wide and 1/2" from the edges; four corner holes drilled 1" from each edge and two holes drilled 1 1/2" from center of the top and bottom edges. Sign can be mounted on a Green U-Channel Post, a 4" x 4" Pressure Treated Post, or on the athletic field fencing.
- The sign can be strengthened using 1/2" CDX Plywood as a backing secured in each corner of the sign using 1/4" x 1" Galvanized Hex Head Bolts.
- When mounting sign, ensure that no protrusions are present that could injure someone.
- See below for exact wording of sign.



ATHLETIC FIELD RULES SIGN/NUMBER SIGN/FIELD MONITOR SIGN

DESIGN SPECIFICATIONS


- The Athletic Field Rule sign should be made using .080 thick metal with rounded corners. The dimensions should be 24" across x 18" high, with reflective green letters and 1/2" border on a reflective white background, See page 10 for exact wording of sign.
- The Athletic Field Rule sign should be mounted either on the athletic field fencing by itself at each dugout or on **Two 4" x 4" x 96" Pressure Treated Posts** in combination with just the Field Number Sign or with both the Field Number Sign and the Field Monitor sign stacked on top of one another. The Field Number sign would be underneath the Field Monitor sign.
- When mounting the Athletic Field Rule sign on fencing, mount the top of the sign approximately 6' above grade and as near as possible to the entrances of the dugouts or field. Try to place the sign so it doesn't obstruct the spectators or players view if possible. When mounting, ensure that no protrusions are present that could injure someone.
- The Field Number sign should be made using .080 thick metal with rounded corners. The dimensions should be 24" across x 24" high, with reflective blue Park Authority logo, with reflective green letters and 1/2" border on a reflective white background. The 1/2" border should be 1/2" from the edge of the sign. See page 11 for exact wording of sign.
- The Field Monitor sign should be made using .080 thick metal with rounded corners. The dimensions should be 24" across x 24" high, with reflective blue Park Authority logo, reflective green letters/numbers and 1/2" border, red reflective letters for the words "**Closed**" and "**Keep Off No Trespassing**" (see sign), all on a reflective white background. The 1/2" border should be 1/2" from the edge of the sign. The sign should be cut in half and then the top half should be attached with a 1 1/2" x 16" piano hinge to the bottom half of the sign. The piano hinge should be attached to the sign using pop-rivets. Cut out two 1/2" x 2" slots, that are centered and started a 1/2" from the bottom and top edges. See page 11 for exact wording
- The Field Number sign and the Field Monitor sign should be mounted either on the athletic field fencing preferably at backside of dugout that faces the direction that most players will be approaching the field from or on **Two 4" x 4" x 96" Pressure Treated Posts** in combination with the Athletic Field Rule sign.
- When mounting Field Monitor sign, and Field Number sign on fencing see page 12
- When mounting Athletic Field Rule sign, Field Monitor sign, and Field Number sign on posts use **Two 4" x 4" x 96" Pressure Treated Posts**, the posts should be trimmed 1" from the top with the saw blade at a 45° angle. The outside edges of the signs should be even with the outside edges of the posts. For support, notch the posts out and install **Two 2" x 4" x 24" Pressure Treated Braces**, use 1/2" lag bolt, the top of first brace for the Athletic Field Rule should be 35" down from top of the two 4" x 4" x 96" pressure treated posts, and 14" down for the Field Number sign.
- Mount the Athletic Field Rule sign first using **Four 8 x 1" Pan Head Screws** at each corner of sign, and 1 1/2" from each edge. Have the top of the sign 28" from top of the posts.
- Begin attaching the Field Number Sign/Field Monitor Sign. Place Field Number sign on sign post first. Mark the Field Number sign where the two slots in the flip sign are located. Center **Two Galvanized or Stainless Steel 1/2" Pipe U-Bolts with 1/4" Threads** within each of the marks for the slots on the Field Number sign. Mark the Field Monitor sign where the u-bolts will attach and then drill the holes.. Attach both of the u-bolts to Field Number sign.
- Attach Field Number sign to the **Two 4 X 4 X 96"** posts using **Four 8 x 1" Pan Head Screws** at each corner of sign, drilling the four corner holes 1 1/2" from edge. Have the top of the sign 3" from top of the posts. Place Field Monitor sign on top of the Field Number sign lining up the slots for the u-bolts. Attach Field Monitor Sign using **Two 8 x 1" Pan Head Screws**. One on each side of sign, 6" from top of sign and 1 1/2" from each edge.

If mounted on posts, the sign should be installed, using concrete, at a depth of 24" below grade. The concrete should taper away from the posts and be covered with 2" of backfill. The bottom of the sign should be approximately 28" above grade.




FIELD NUMBER SIGN AND FIELD MONITOR SIGN DESIGN SPECIFICATIONS

FIELD NUMBER SIGN

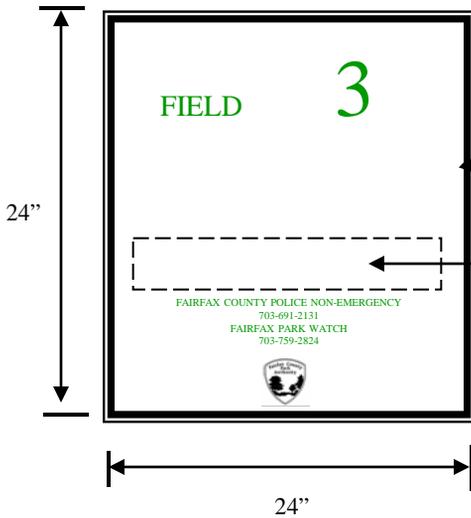


LOCATION OF INFORMATIONAL STICK ON SIGN:
“ **THESE FIELDS ADOPTED BY LEAGUE NAME**”
(STICK ON SIGN SHOULD BE 3” x 18” IN DIAMETER AND
HAVE A ROYAL BLUE BACKGROUND W/ WHITE
LETTERING.

FIELD MONITORING SIGN IN “CLOSED” POSITION

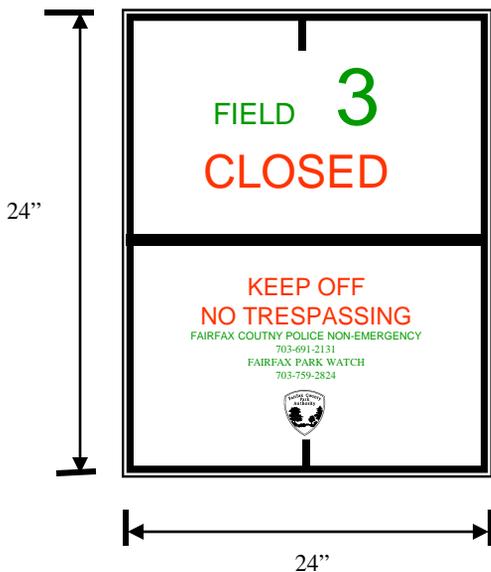

FIELD MONITORING SIGN IN “OPEN” POSITION

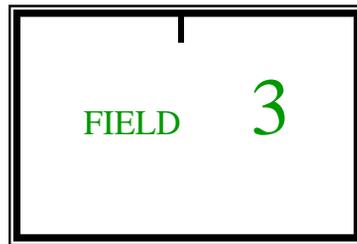

FIELD MONITOR SIGN AND NUMBER SIGN MOUNTED ON FENCING DESIGN SPECIFICATIONS

- When mounting the Field Monitor, Field Number Sign on fencing, mount the top of the signs approximately 6' above grade and preferably on the backside of a dugout that faces the direction that most players will be approaching the field from. Try to place the sign so it doesn't obstruct the spectators or players view if possible. When mounting, ensure that no protrusions are present that could injure someone.
- Attach the Field Monitor sign to Field Number sign in the same manner as was described above when attaching the sign to two 4 x 4 posts. Attach u-bolts to Field Number sign in the same manner as was described above when attaching the sign to two 4" x 4" posts.
- Secure the sign assembly to the fencing using **Two 1" x 2" x 15" Wood Stakes** and **Four 5/16" x 2" Galvanized Bolts**. Using a 5/16" drill bit, drill two holes through the top half of the sign and sign "A". The holes should be 1 1/2" from the top edge and 3" from each side. Drill two holes through the bottom half of the Field Number sign only. The holes should be 1 1/2" from the bottom edge and 3" from each side. Using the same drill bit, drill holes on each end of the stakes. The holes should be 1 1/2" from the end of the stakes and centered from side to side. The grading stakes should be placed on the field side of the fence and should run horizontally, one at the top and one at the bottom of the sign.

