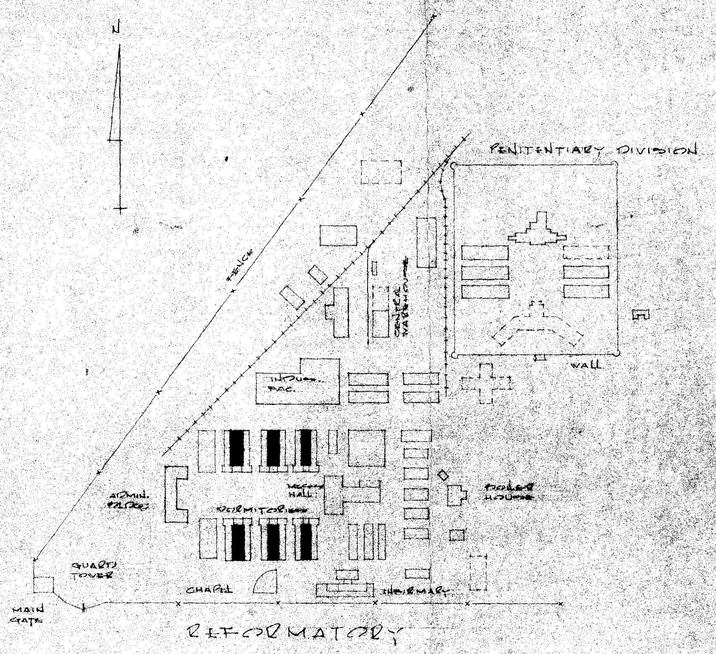

REFORMATORY

SCALE: 1"=200'

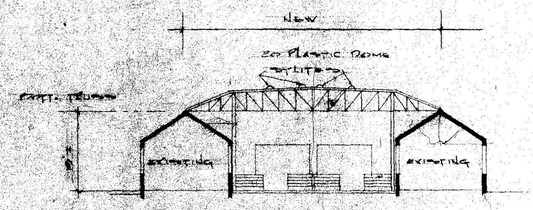

TYPICAL SECTION

SCALE: 1"=20'

GENERAL NOTES:

1. GROSS AREA OF ENCLOSED COURT: 6,000 SQ. FT. EA. COURT (18,000 SQ. FT. TOTAL)
2. UNDERPIN EXISTING FOOTAGE AS REQUIRED BY PLACEMENT OF NEW COLUMNS SUPPORTING ROOF.
3. FLOORS: ASPHALT TILE THROUGHOUT EXCEPT IN NEW TOILET ROOMS. TOILET ROOMS: CERAMIC TILE FLOOR
4. WALLS: CLOSURE END WALLS AT ENCLOSED COURT, BRICK FACED EXTERIOR WITH SPTU BACKING CAVITY WALL.

   4' HIGH PARTITIONS, SPTU

   NEW INTERIOR WALLS SPTU

   PROVIDE SPTU ON EXISTING WALL IN NEW TOILETS
5. ROOF CONSTRUCTION: BAR JOIST SUPPORTED BY STEEL FRAMED TRUSSES. METAL DECK AND LIGHTWEIGHT CONCRETE WITH BUILT-UP ROOFING. PROVIDE LIGHT GRAVEL STOPS AND FLASH WHERE NEW ROOF JOIN EXIST. ROOF CONSTRUCTION.
6. WINDOWS: STEEL SECURITY WINDOWS OF SAME WIDTH AS EXISTING, BUT 6'-8" HIGH.
7. DOORS: NEW DOORS TO BE HOLLOW METAL WITH HOLLOW METAL FRAMES.
8. HEATING: EXTEND EXISTING HEATING SYSTEM TO ACCOMODATE ENLARGED AREA
9. VENTILATION: PROVIDE VENTILATION THROUGHOUT WITH DUCT SYSTEM FROM ROOM CONVERTED TO FAN ROOM.
10. LIGHTING: FLUORESCENT TYPE FIXTURES SUSPENDED FROM BAR JOISTS
11. SKYLIGHT: PROVIDE PLASTIC DOME SKYLIGHTS FOR NATURAL LIGHT AT ENCLOSED COURT AREA

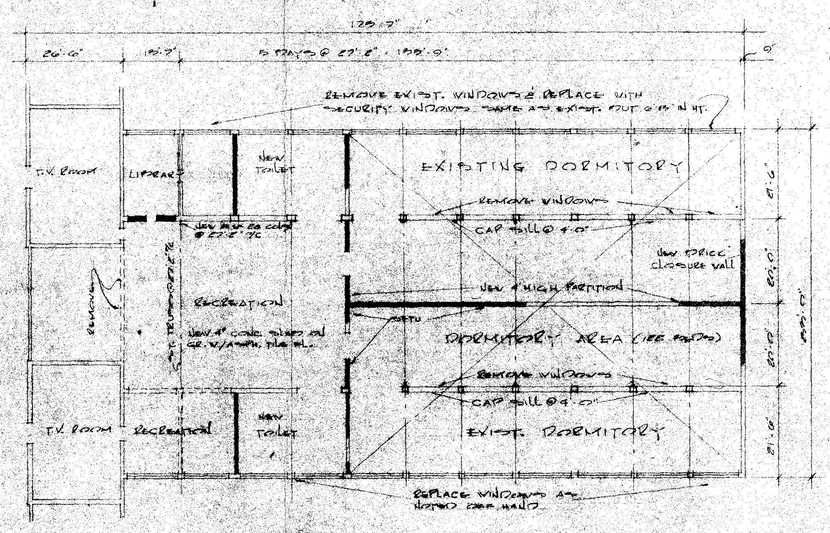

TYPICAL FLOOR PLAN

SCALE: 1"=20'

LEGEND

- EXIST. CONSTRUCTION
- NEW CONSTRUCTION
- TO BE REMOVED

DATE DEC. 1968	**BUDGET SKETCH**
APPROVED	LOCATION, FLOOR PLANS & SECTION
APPROVED	P R O P O S E D **DORMITORY RENOVATIONS** LORTON REFORMATORY LORTON, VIRGINIA
DEPT. OF CORRECTIONS APPROVED	
DIRECTOR DEPT. BLDGS. & GROUNDS	GOVERNMENT OF THE DISTRICT OF COLUMBIA DEPARTMENT OF BUILDINGS AND GROUNDS PROJECT NO. 22-64 SHEET 1 OF

COMPLETED