NOTICE TO PURCHASER

NOTHING SHOWN HERE, THIS DRAWING IS TO BE CONSTRUED AS GUARANTEE THE MATERIALS TO BE FURNISHED BY THE AMERICAN LAUNDRY MACHINERY COMPANY OTHER THAN WHAT IS EXPLICITLY IN THE CONTRACT.

CONNECTIONS ITEMS TO BE PURCHASED BY OTHER CONTRACTORS

1 SIGNAL WITH ALL PARTS SAMPLE AND SUPPLY.

1 SET OF HOT AND COLD WATER PIPING AND VALVES.

1 SET OF ALL DRAIN AND AIR PIPES AND VALVES.

1 SET OF ALL LIGHT CONNECTIONS, STEAM AND AIR.

1 SET OF ALL DRAIN AND WASTE PIPES.

1 SET OF ALL FOUNDATIONS, GROUTED WITH CONCRETE WORK.

1 SET OF ALL ELECTRIC CONNECTIONS INCLUDING THE WIRING BETWEEN STARTERS & MOTORS.

1 SUB-PANELBOARD FOR CONTROL PANEL BOARD.

THE ABOVE MENTIONED CONNECTIONS TO AND FROM THE VARIOUS LAUNDRY MACHINERY AND APPARATUS IS NOT INCLUDED IN THE CONTRACT FOR LAUNDRY MACHINERY TO BE FURNISHED BY OTHER CONTRACTORS BUT SHOULD BE CONTRACTED AND SPECIFICATIONS.

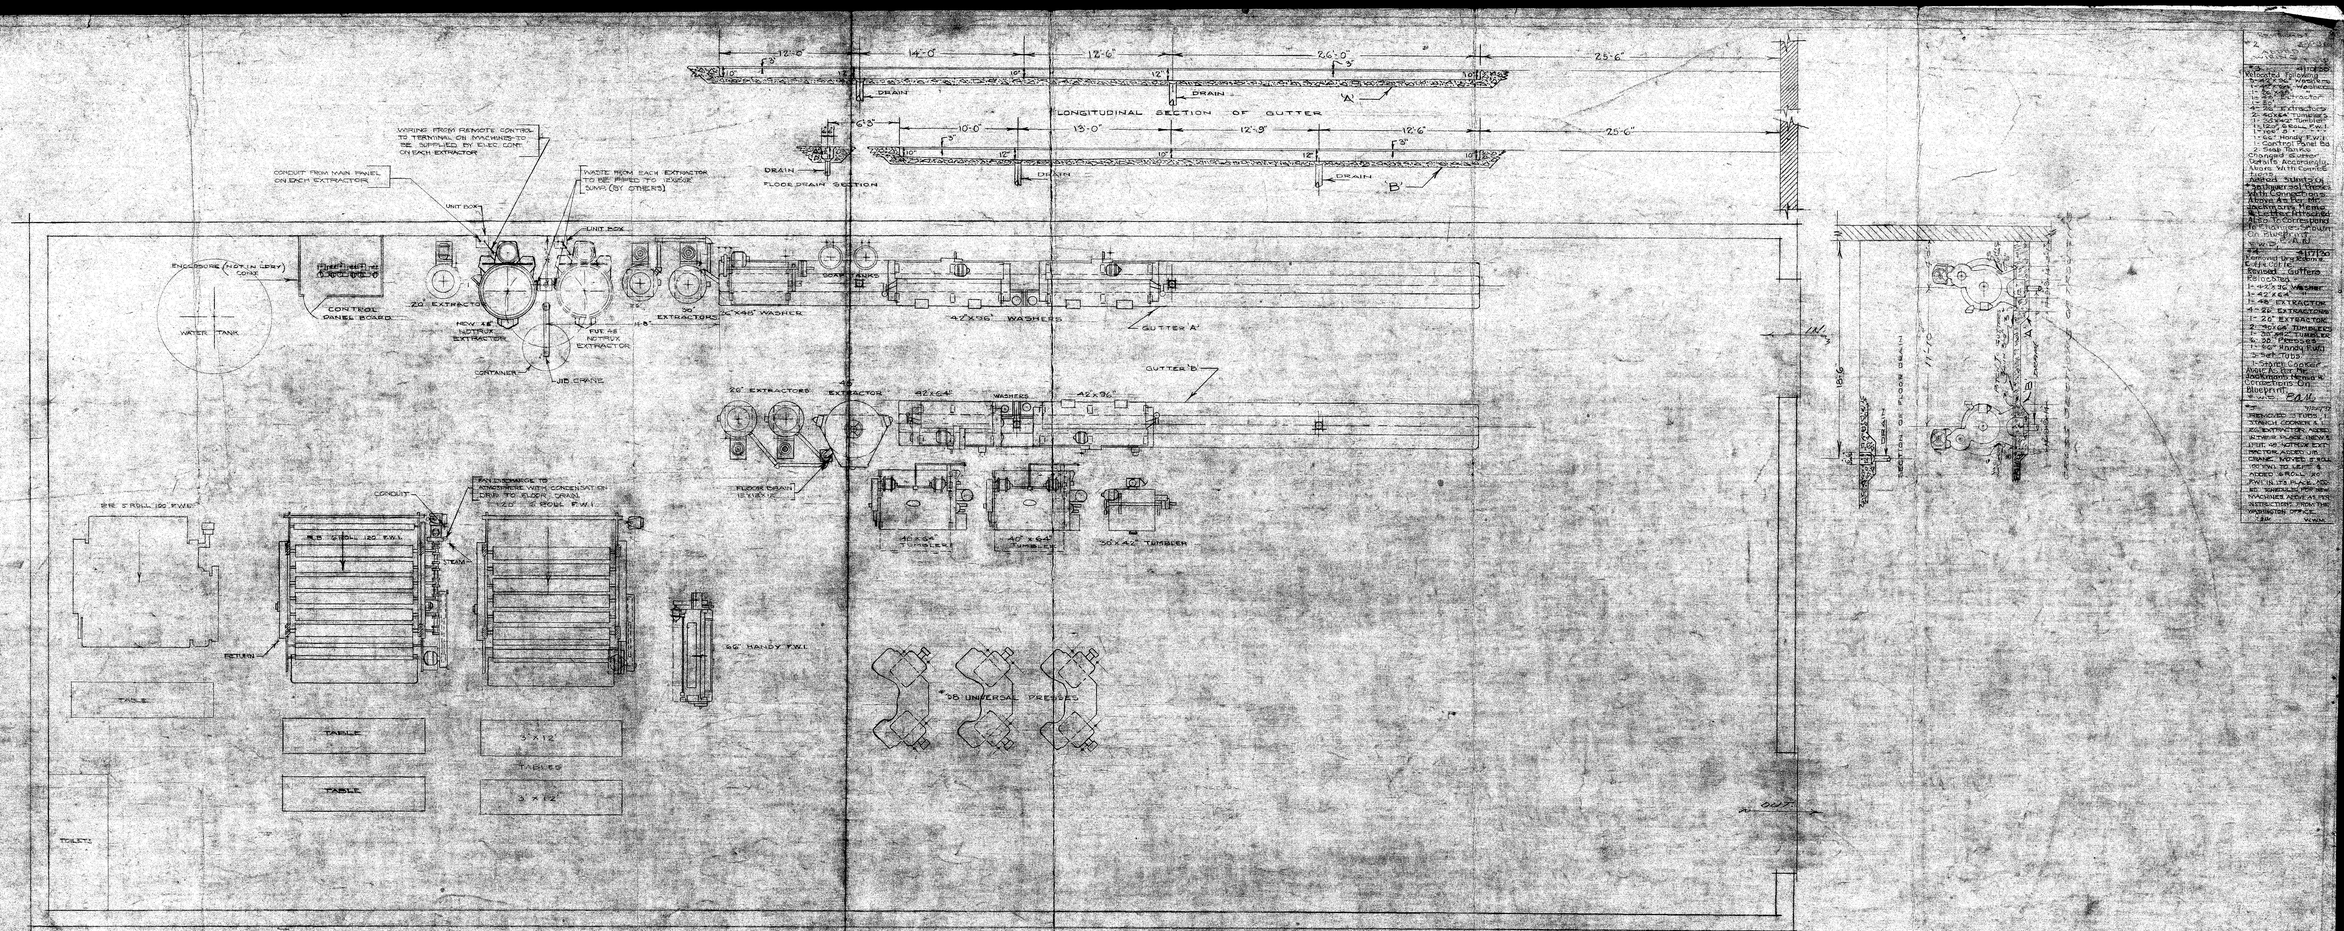

NOTE
THIS SCHEDULE IS SUBJECT TO THE RULES REGULATIONS AND APPROVAL OF THE BOARD OF FIRE UNDERWRITERS AND ALL CITY OR OTHER LOCAL REGULATIONS

SCHEDULE OF CONNECTIONS

ELECTRIC CURRENT 220 VOLTS, 60 CYCLE, 3 PHASE

QUANTITY	MACHINES	STEAM	RETURN	WATER	FAN EXCHANGE	CONDENSATION DRAIN			WEIGHT IN POUNDS	SIZE OF WIRES	REMARKS
1	5 FOOT 120 F.W.I.	2"	2"	4 GAL.	1/2"				25,700	3-#8	TO MAIN PANEL BOARD
										3-#4	
2	48 NOTRUX EXTRACTOR (NEW) 1 NEW 1 FUTURE			2"					2,650	3-#4	WIRING FROM REMOTE CONTROL TERMINAL ON MACHINE (BY OTHERS)
										3-#14	

NOTE!
MINIMUM CEILING HEIGHT DESIRED UNDER BEAMS
12'-0"

OPENINGS THRU WHICH MACHINES ARE TO BE TAKEN MUST BE AT LEAST 7' WIDE BY 7' HIGH

FLOOR UNDER SUPPORTS OF MACHINES SHOULD BE LEVEL

HIGH PRESSURE STEAM FOR HEATING LAUNDRY MACHINERY DESIRED

LAUNDRY PLAN
FOR
DISTRICT REFORMATORY
LORTON, VA.

[redacted]

AMERICAN LAUNDRY MACHINERY CO.
NEW YORK CITY

DATE 12-16-1929 JOB NO.