



PROJECT MANAGER: TIMOTHY CONLEY, P.E. (703) 877-5743
 SURVEYED BY: DATE: RICE ASSOCIATES, INC. MAY 2015
 DESIGN BY: WHITMAN, REQUARDT & ASSOCIATES, LLP (703) 293-9717
 SUBSURFACE UTILITY BY: DATE: ACCUMARK, INC. AUGUST 2015

TYPICAL SECTIONS (N.T.S.)

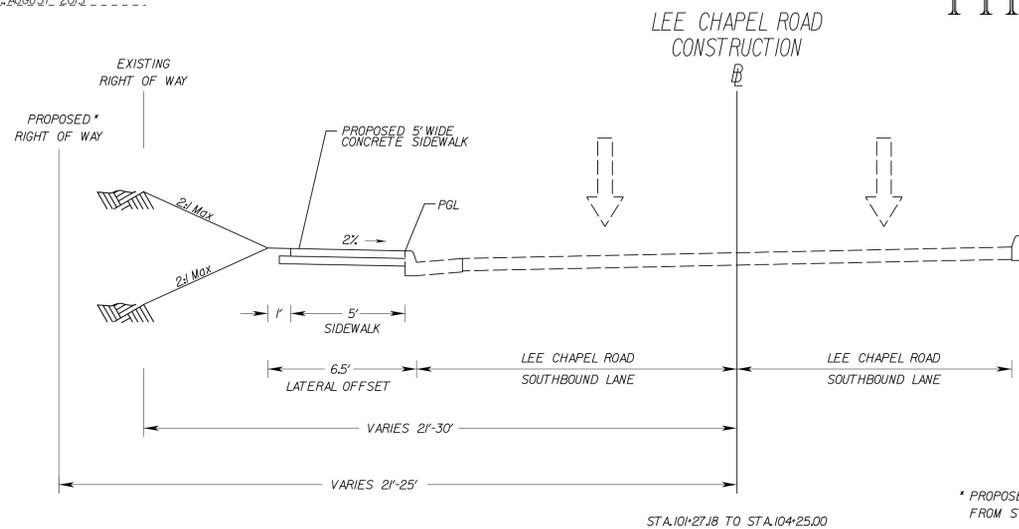


* PROPOSED RIGHT OF WAY FROM STA.101+30.78 TO STA.101+50.00

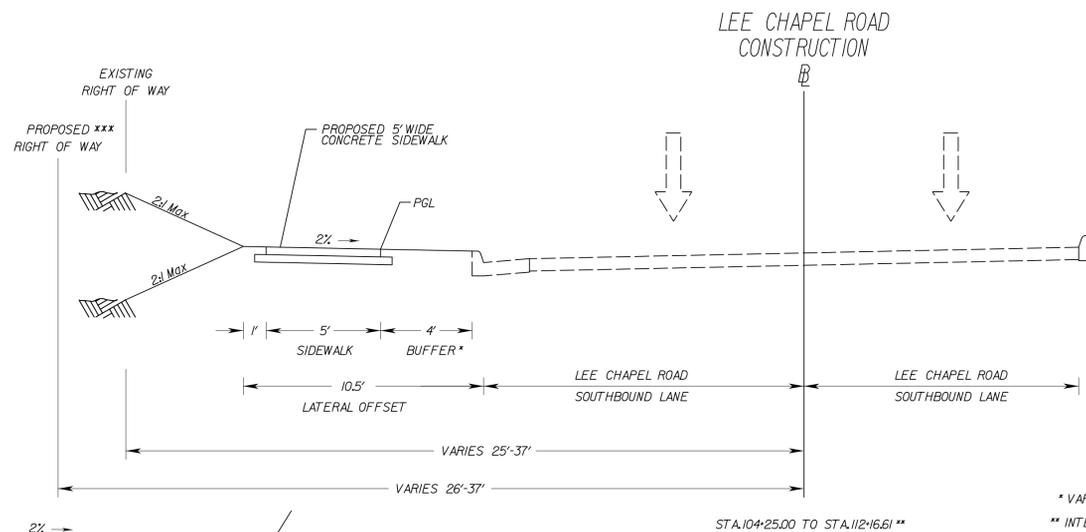


* VARIES 0' TO 4' STA.104+25.00 TO STA.104+50.00

** INTERSECTION WITH COVERED BRIDGE ROAD FROM STA.108+37.60 TO 109+23.93

*** PROPOSED RIGHT OF WAY FROM STA.107+40.49 TO STA.108+37.60 & STA.109+23.93 TO STA.109+37.20

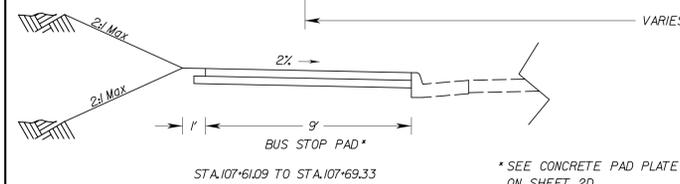

* SEE CONCRETE PAD PLATE ON SHEET 2D


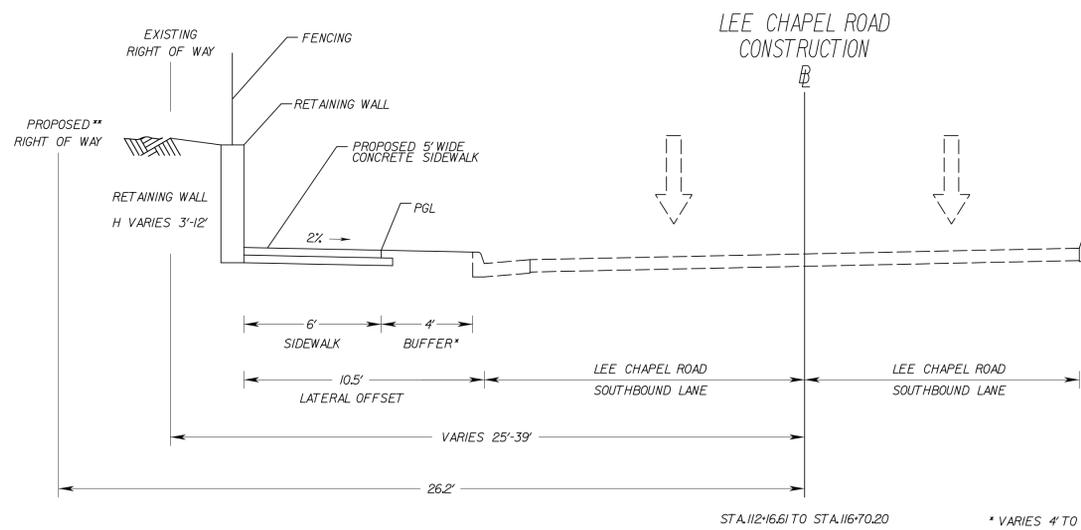


* VARIES 4' TO 0' STA.116+25.00 TO STA.116+70.20

** PROPOSED RIGHT OF WAY FROM STA.113+69.34 TO STA.115+09.39

CURB RAMP PAVEMENT SECTION NOTES

- ① SURFACE - 1.5" ASPHALT CONCRETE TYPE SM-9.5D
- ② BASE - 6" ASPHALT CONCRETE TYPE BM-25.0A
- ③ SUBBASE - 12" AGGREGATE BASE MATERIAL TYPE 1 SIZE 21B
- ④ EXISTING ASPHALT LAYERS TO BE REPLACED WITH ASPHALT BASE MATERIAL BM-25.0A

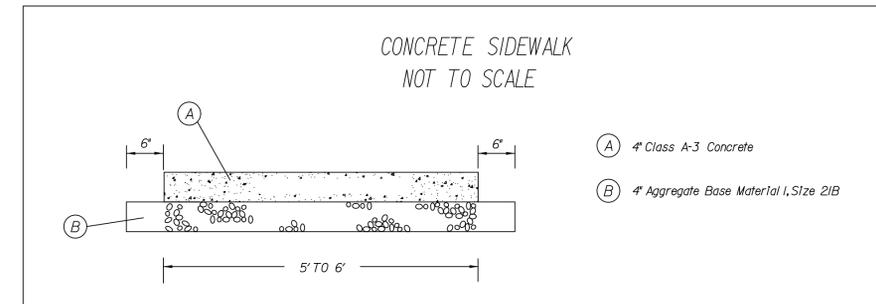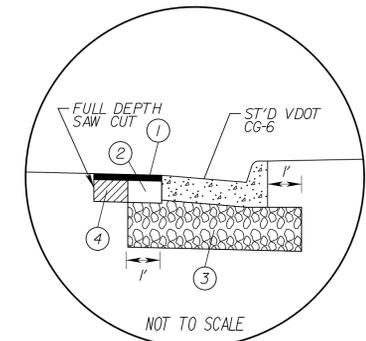

- Ⓐ 4" Class A-3 Concrete
- Ⓑ 4" Aggregate Base Material 1, Size 21B



Whitman, Requardt & Associates, LLP
 3701 Pender Drive, Suite 450, Fairfax, Virginia 22030

THESE PLANS ARE UNFINISHED AND UNAPPROVED AND ARE NOT TO BE USED FOR ANY TYPE OF CONSTRUCTION OR THE ACQUISITION OF RIGHT OF WAY.

EMERGENCY POLICE - FIRE - RESCUE 911			
FAIRFAX COUNTY, VIRGINIA			
DEPARTMENT OF PUBLIC WORKS AND ENVIRONMENTAL SERVICES-UTILITIES DESIGN & CONSTRUCTION DIVISION 12000 GOVERNMENT CENTER PARKWAY, SUITE 463 FAIRFAX, VA., 22035-0052			
OFFICE OF CAPITAL FACILITIES 703-324-5800		LEE CHAPEL ROAD WALKWAY TYPICAL SECTIONS	
PROJECT NO: 5G25-060-030			
SCALE	DESIGNED: TW	SHEET	
NTS	DRAFTED: TW	2B	
	CHECKED: TLL		
DESCRIPTION	BY	APPROVED	DATE

FUND # 300-C30050