### SPRINGFIELD DISTRICT 2020 PAVING & RESTRIPING

Public Information Meeting February 26, 2020 6.30 pm



Presenters: Claudia Llana, VDOT and Lauren Delmare, FCDOT









### AGENDA

- VDOT Paving Program Overview
- Striping Modifications
- ➤ Summary
- ► Q&A













## VDOT Paving Program Overview












### NOVA DISTRICT PAVEMENT CONDITION RATINGS 2019

#### CONDITION (CCI)

- EXCELLENT (90 100)
- GOOD (70 89)
- FAIR (60 69)
- POOR (50 59)
- VERY POOR (0 49)
- NOT RATED (-1)

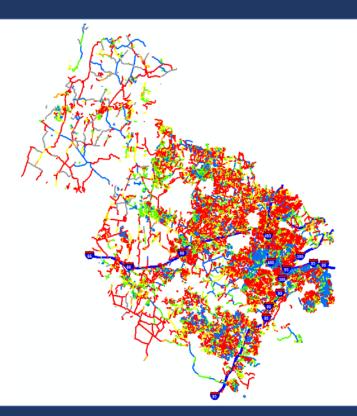








Serving Fairfax County Since 1977



### 2019 Dashboard Pavement Condition Status

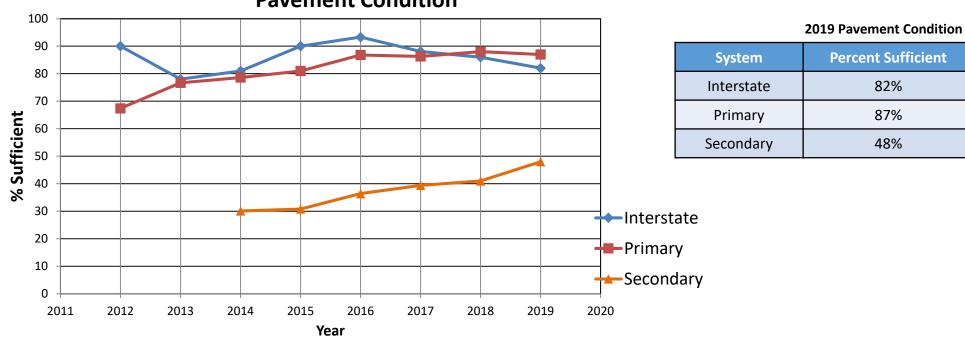

#### **Pavement Condition**









82%

87%

48%

Goal

82%

82%

65%

# PAVING ALLOCATIONS FOR NOVA DISTRICT 2013-2020

	Interstate	Primary	Secondary	Total
Fiscal Year	(\$M)	(\$M)	(\$M)	(\$M)
FY 2013	9.4	21.9	26.8	58.1
FY 2014	22.0	17.3	44.0	83.3
FY 2015	6.9	14.8	114.1	135.8
FY 2016	7.8	23.9	107.2	138.9
FY 2017	9.4	21.0	104.9	135.3
FY 2018	14.2	16.1	110.6	140.9
FY 2019	9.6	15.6	80.7	105.9
FY 2020	9.3	15.7	79.8	104.8
Total 2013-2020	88.6	146.3	668.1	903.0









### 2013-2020 NOVA DISTRICT REPAVING FACTS

2013-2020	Interstate	Primary	Secondary	Total
(Fairfax - Arlington)				
Total Expended, NoVA District 2013- 2020, \$M	88.6	146.3	668.1	903.0
Lane Miles Paved, (Fairfax + Arlington)	241.1	385.3	3,277.7	3,904.1
Total Lane Miles Inventory (Arlington+Fairfax)	511.4	911.8	5,597.3	7,020.5
Total Lane Miles Inventory (NOVA District)	727.0	1,736.0	11,122.0	13,585.0
% of Network Paved in Past 8 Years (Fairfax +Arlington)	47%	42%	59%	56%









### HOW ARE ROADS SELECTED FOR PAVING?

#### Some Factors that Affect Paving Selections:

- Pavement Condition
- Traffic Volume
- Whole Neighborhoods versus Paving Main Streets Only
- Economies of Scale/Mobilization Costs
- Feedback from Maintenance Crews









Since 1977



### TYPES OF TREATMENT

#### **Preventive Maintenance**

- Slurry Seal/Latex/Chip Seal
- Patching (not extensive)
- Crack Seal

#### Plant Mix (Corrective Maintenance)

- Mill less than 2 inches
- Overlay less than 2 inches of Surface
  Mix Asphalt
- > Patching

#### Plant Mix (Restorative Maintenance)

- Mill greater than 2 inches less than 4 inches
- Overlay 2 inches of Intermediate Mix Asphalt
- Overlay < 2 inches of Surface Mix Asphalt</p>

#### Full Depth Reclamation (FDR)

- Existing Asphalt / Aggregate / Soil Stabilization
  with Cement (6-8 inch.)
- Overlay Intermediate Mix Asphalt
- Overlay Surface Mix Asphalt









### SCHEDULE FOR PAVING PLANNING/IMPLEMENTATION

#### January - February

Bids are received for current calendar year schedules, contracts are executed. Next calendar year schedules are in planning stages.

#### March - April

Work begins on current calendar year schedules when weather is warm enough. Next calendar year schedules are being reviewed and further data gathered.

#### May - October

Current year schedules are underway. Next calendar year schedules are coordinated and sent to Richmond to prepare for contract advertisement.


#### November - December

Current year schedules close out. Next year contracts are advertised for bids.



### ONLINE PAVING MAP

#### http://www.virginiadot.org/novapaving

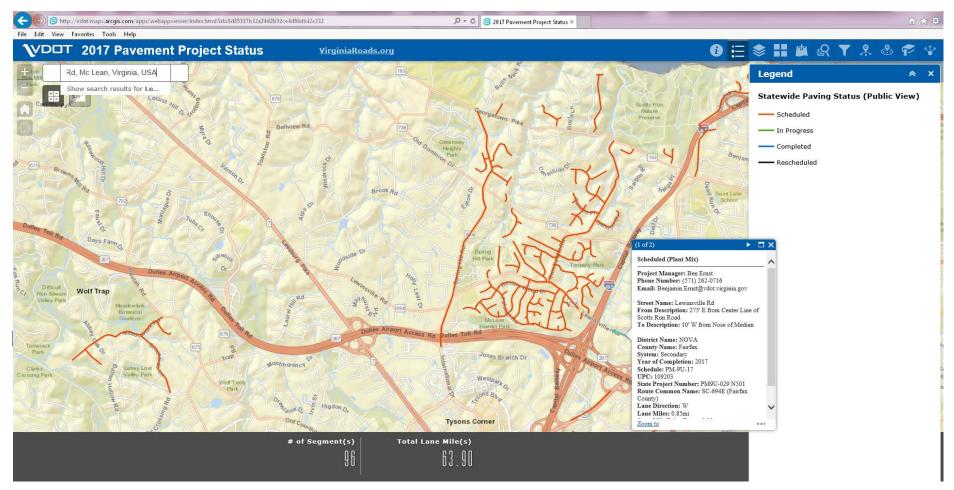

### PAVING INFORMATION ONLINE

- Online paving map located at <u>http://www.virginiadot.org/novapaving</u>
- Virginia Roads pavement condition information located at <u>http://www.virginiaroads.org</u>
- MyVDOT (<u>https://my.vdot.virginia.gov</u>) or call 1-800-FOR-ROAD (367-7623) for maintenance requests









### Striping Modifications











### FAIRFAX COUNTY COMPREHENSIVE PLAN

- Seeks to improve traffic safety and provide transportation options to people around the County
- <u>Bicycle Network Plan</u>: Establishes key bike route network and suggests type of bicycle facility
- Safer/more comfortable facility type can be implemented if space allows
- Routes can be added to connect destinations/origins to the bike network
- Implementation Options (if no road widening needed):
  - ➤ Capital Projects (\$\$\$)
  - > Through Paving & Restriping Process (\$)










### TYPES OF BICYCLE RIDERS IN FAIRFAX COUNTY

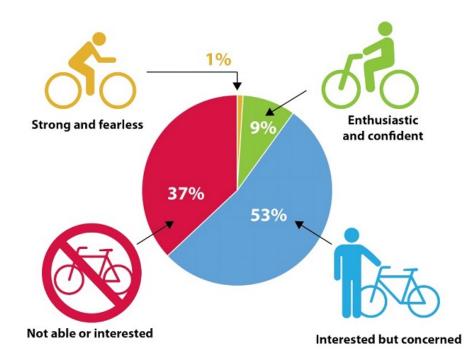




### TYPES OF BICYCLE FACILITIES IN FAIRFAX COUNTY



Shared lane markings indicate a shared travel lane for bicycles and cars.



Bike lanes give bicycles and cars their own spaces, making it safer to pass legally.

**BUFFERED BIKE LANE** 

Buffered bike lanes provide additional space between bicycles and cars. The extra space makes both cycling and driving more comfortable.










### BENEFITS OF BICYCLE INFRASTRUCTURE

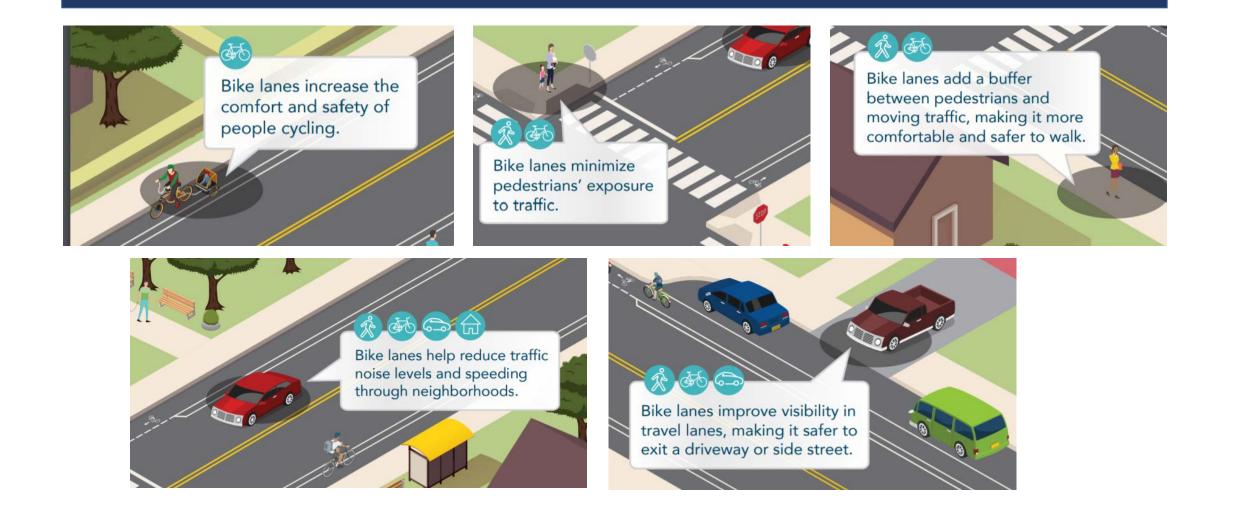

### THE TRAFFIC CALMING EFFECT

#### Annandale Road

BEFORE



Speeding Concerns

AFTER



Top speeds virtually eliminated









### PEDESTRIAN SAFETY

Opportunity to review

- Study busy pedestrian crossing locations without crosswalk markings
- Upgrade existing crosswalk striping
- Evaluate for signage and other safety improvements











### COMMUNITY FEEDBACK

Paving-related comments (e.g., drainage issues, missing signage, signal repair, walkway repair and sight distance issues due to vegetation overgrowth) should be submitted through the myVDOT portal: <u>https://my.vdot.virginia.gov/</u>. If you would like to request road repairs, please follow the "I need a road repaired" link on the VDOT portal or call 1-800-FOR-ROAD (1-800-367-7623).

Unfortunately, no additional roads can be added to the preliminary 2020 paving schedule at this point.

Striping-related comments (e.g., marked parking lanes, crosswalks, and/or sight distance issues due to parked vehicles) can be submitted <u>electronically</u> to FCDOT.

Comments due by March 11, 2020









# Thank you!

### Questions/Comments?







