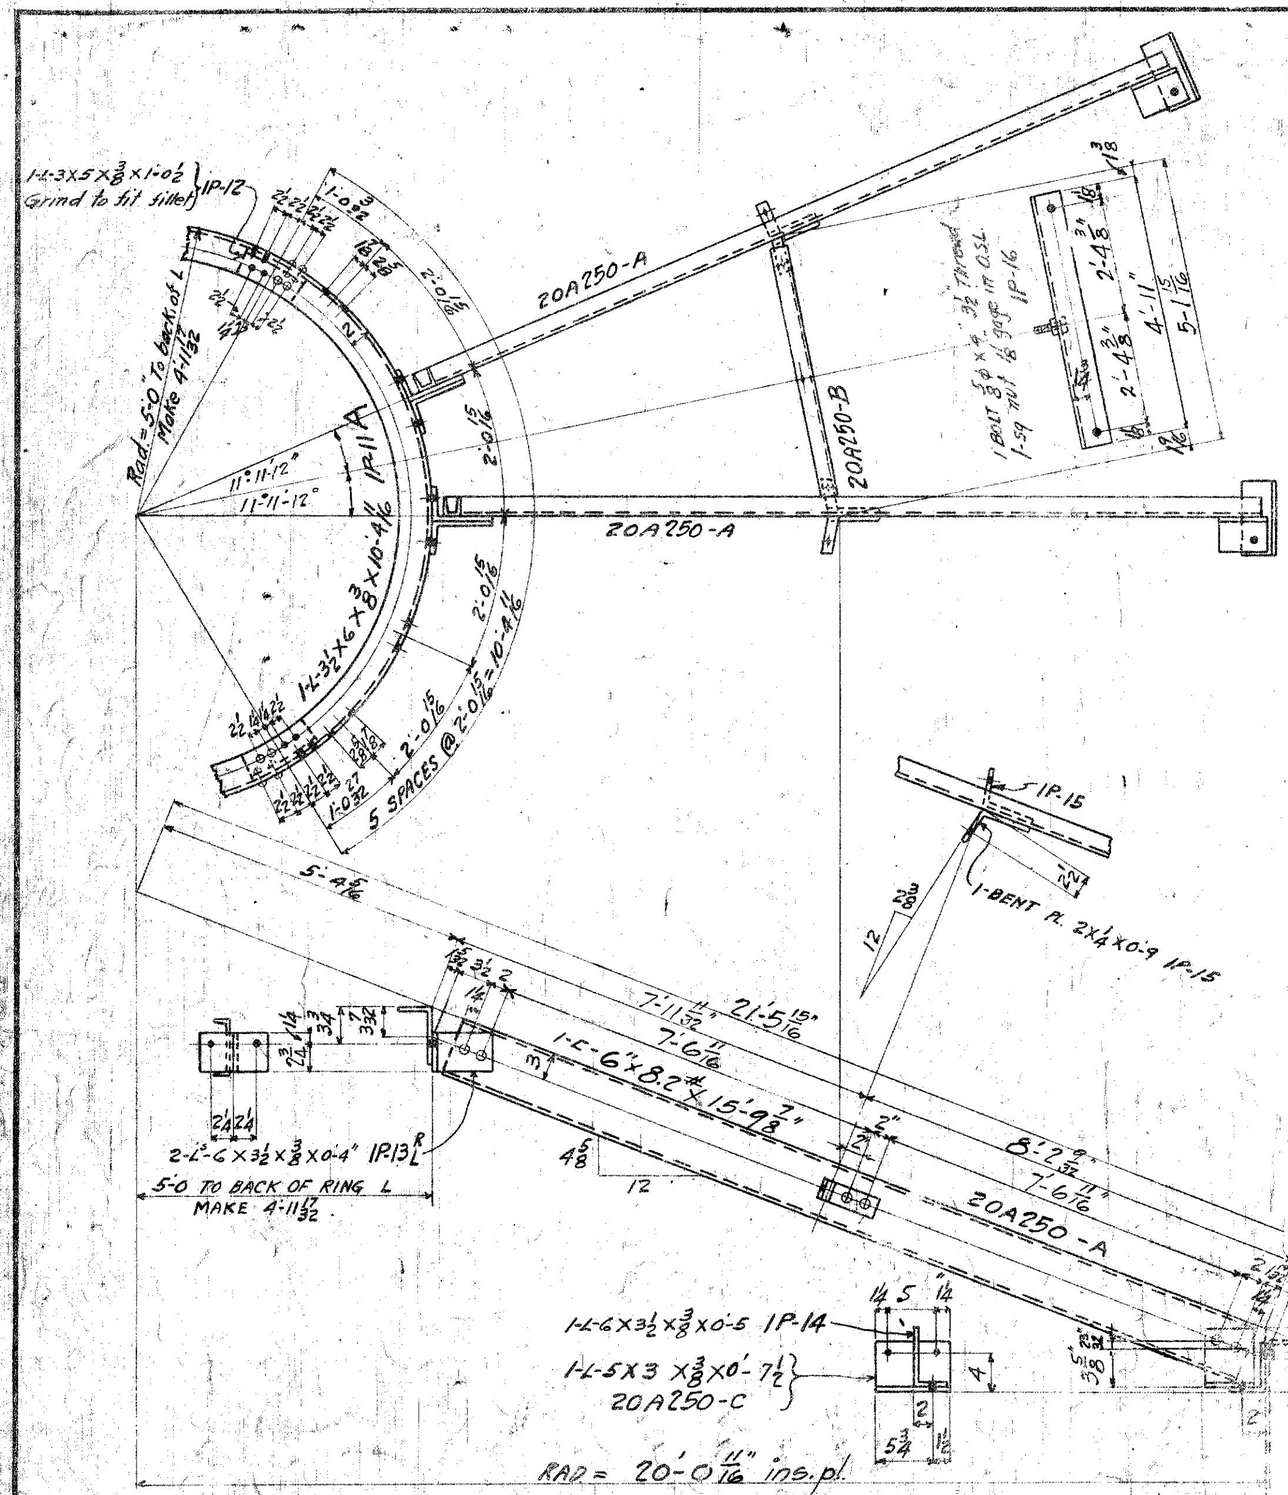

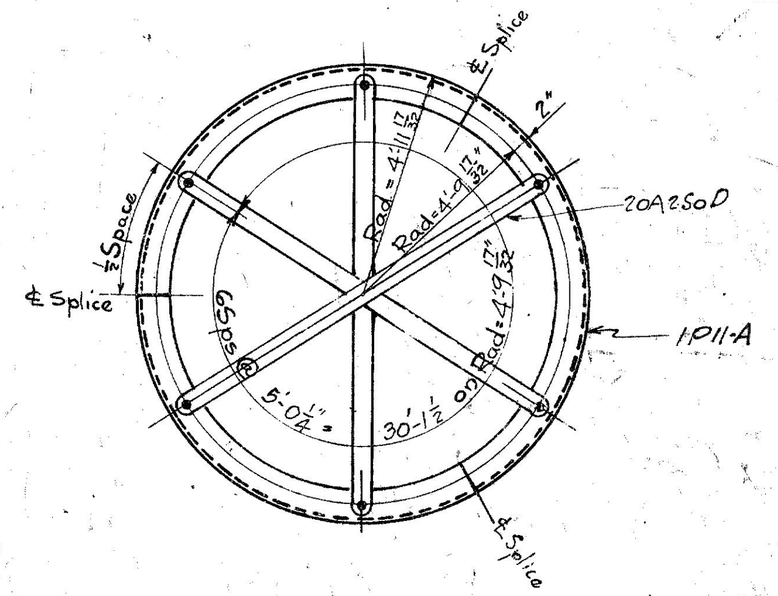

MATERIAL FOR INDEX 20A

SHIP. PCS.	MARK	ASSM. PCS.	DESCRIPTION	LENGTH FT.	LENGTH IN.	ORDERED LENGTH	WT.	HOLES
3	1P-11A		TOP RING	OR ORD. 1 CUTS 3		1L-6X3 1/2X3/8X32'-6 AFTER ROLLING		
		3	L's-6X3 1/2X3/8	10	4 11/16	10'-10 3/4	365	54
		3	L's-5X3X3/8	1	0 1/2		31	24
3	20A250-D		Bars 2"X1/4	9	9		50	6
15	20A250-A		RAFTERS					
		15	L's-6"X8.2#	15	9 7/8		1945	90
	1P-13 R L	30	L's-6X3 1/2X3/8	0	4"		117	90
	1P-14	15	L's-6X3 1/2X3/8	0	5		72	45
	1P-15	30	Bent pls 2X1/4	0	9		39	90
15	20A250-B		PURLINS					
		15	L's-3X2X1/4	4	11"		305	45
	1P-16	15	Bolts 5/8 φ. 3 1/2" thd.	0	4		8	
		15	sq. nuts					
15	20A250-C		LUGS TO TANK					
		15	L's-5X3 X3/8	0	7 1/2		97	45

GENERAL NOTES
RIVETS 5/8 φ
OPEN HOLES 11/16 φ

REVISIONS			
No.	DATE	BY	REMARKS
1	11-17-25	[illegible]	[illegible]
2	11-16-29	RPS	Leg of L 20A250-C
3	3-29-39	B.S.R	ORD. L's. 1P11-A

APPROVED

CHICAGO BRIDGE & IRON WORKS
CHICAGO ILLINOIS

STANDARD ROOF FRAMING
FOR 40'-0" DIA. TANK
250,000 GAL. Elliptical TANK

DRAWN BY W.T.C. DATE 10-8-24
TRACED BY R.G. 3-31-24
CHECKED BY D.M.C. 10-22-24
SHEET ( ) OF ( )

INDEX NO. 20A250

FOLIO 250