Drainage Legend

- △1 → Ex.Pipe/Str.To Be Cleaned
- △2 → Ex.Pipe/Str.To Be Removed
- △3 → Ex.Pipe To Be Abandoned
- △4 → St'd.UD-4
- △5 → St'd.CD-2
- △6 → Ex.utility appurtenance to be reset to match (be flush) prop.grade
- C _ _ _ _ Denotes Construction Limits in Cuts
- F _ _ Denotes Construction Limits in Fills

Roadway Design Legend

- ◇1 → Denotes St'd.CG-6 Req'd.
- ◇2 → Denotes St'd.Radial CG-6 Req'd.
- ◇3 → Denotes St'd.5' Conc.Sidewalk Req'd.
- ◇5 → Denotes St'd.CG-12,Type B Req'd.
- ◇6 → Denotes Tie to Existing Curb
- ◇7 → Denotes Tie to Existing Sidewalk
- ◇8 → Denotes St'd.Full Depth Saw Cut Req'd.
- ◇10 → Denotes St'd.8' Asphalt Sidewalk Req'd.

R/W Legend

- (1) Denotes Temp.Constr.Ease.
- (2) Denotes Prop.Perm.Drain. Ease.

PATTERN LEGEND

- Full Depth Pavement
- Denotes Mill and Overlay and/or Pavement Buildup
- Demolition of Pavement

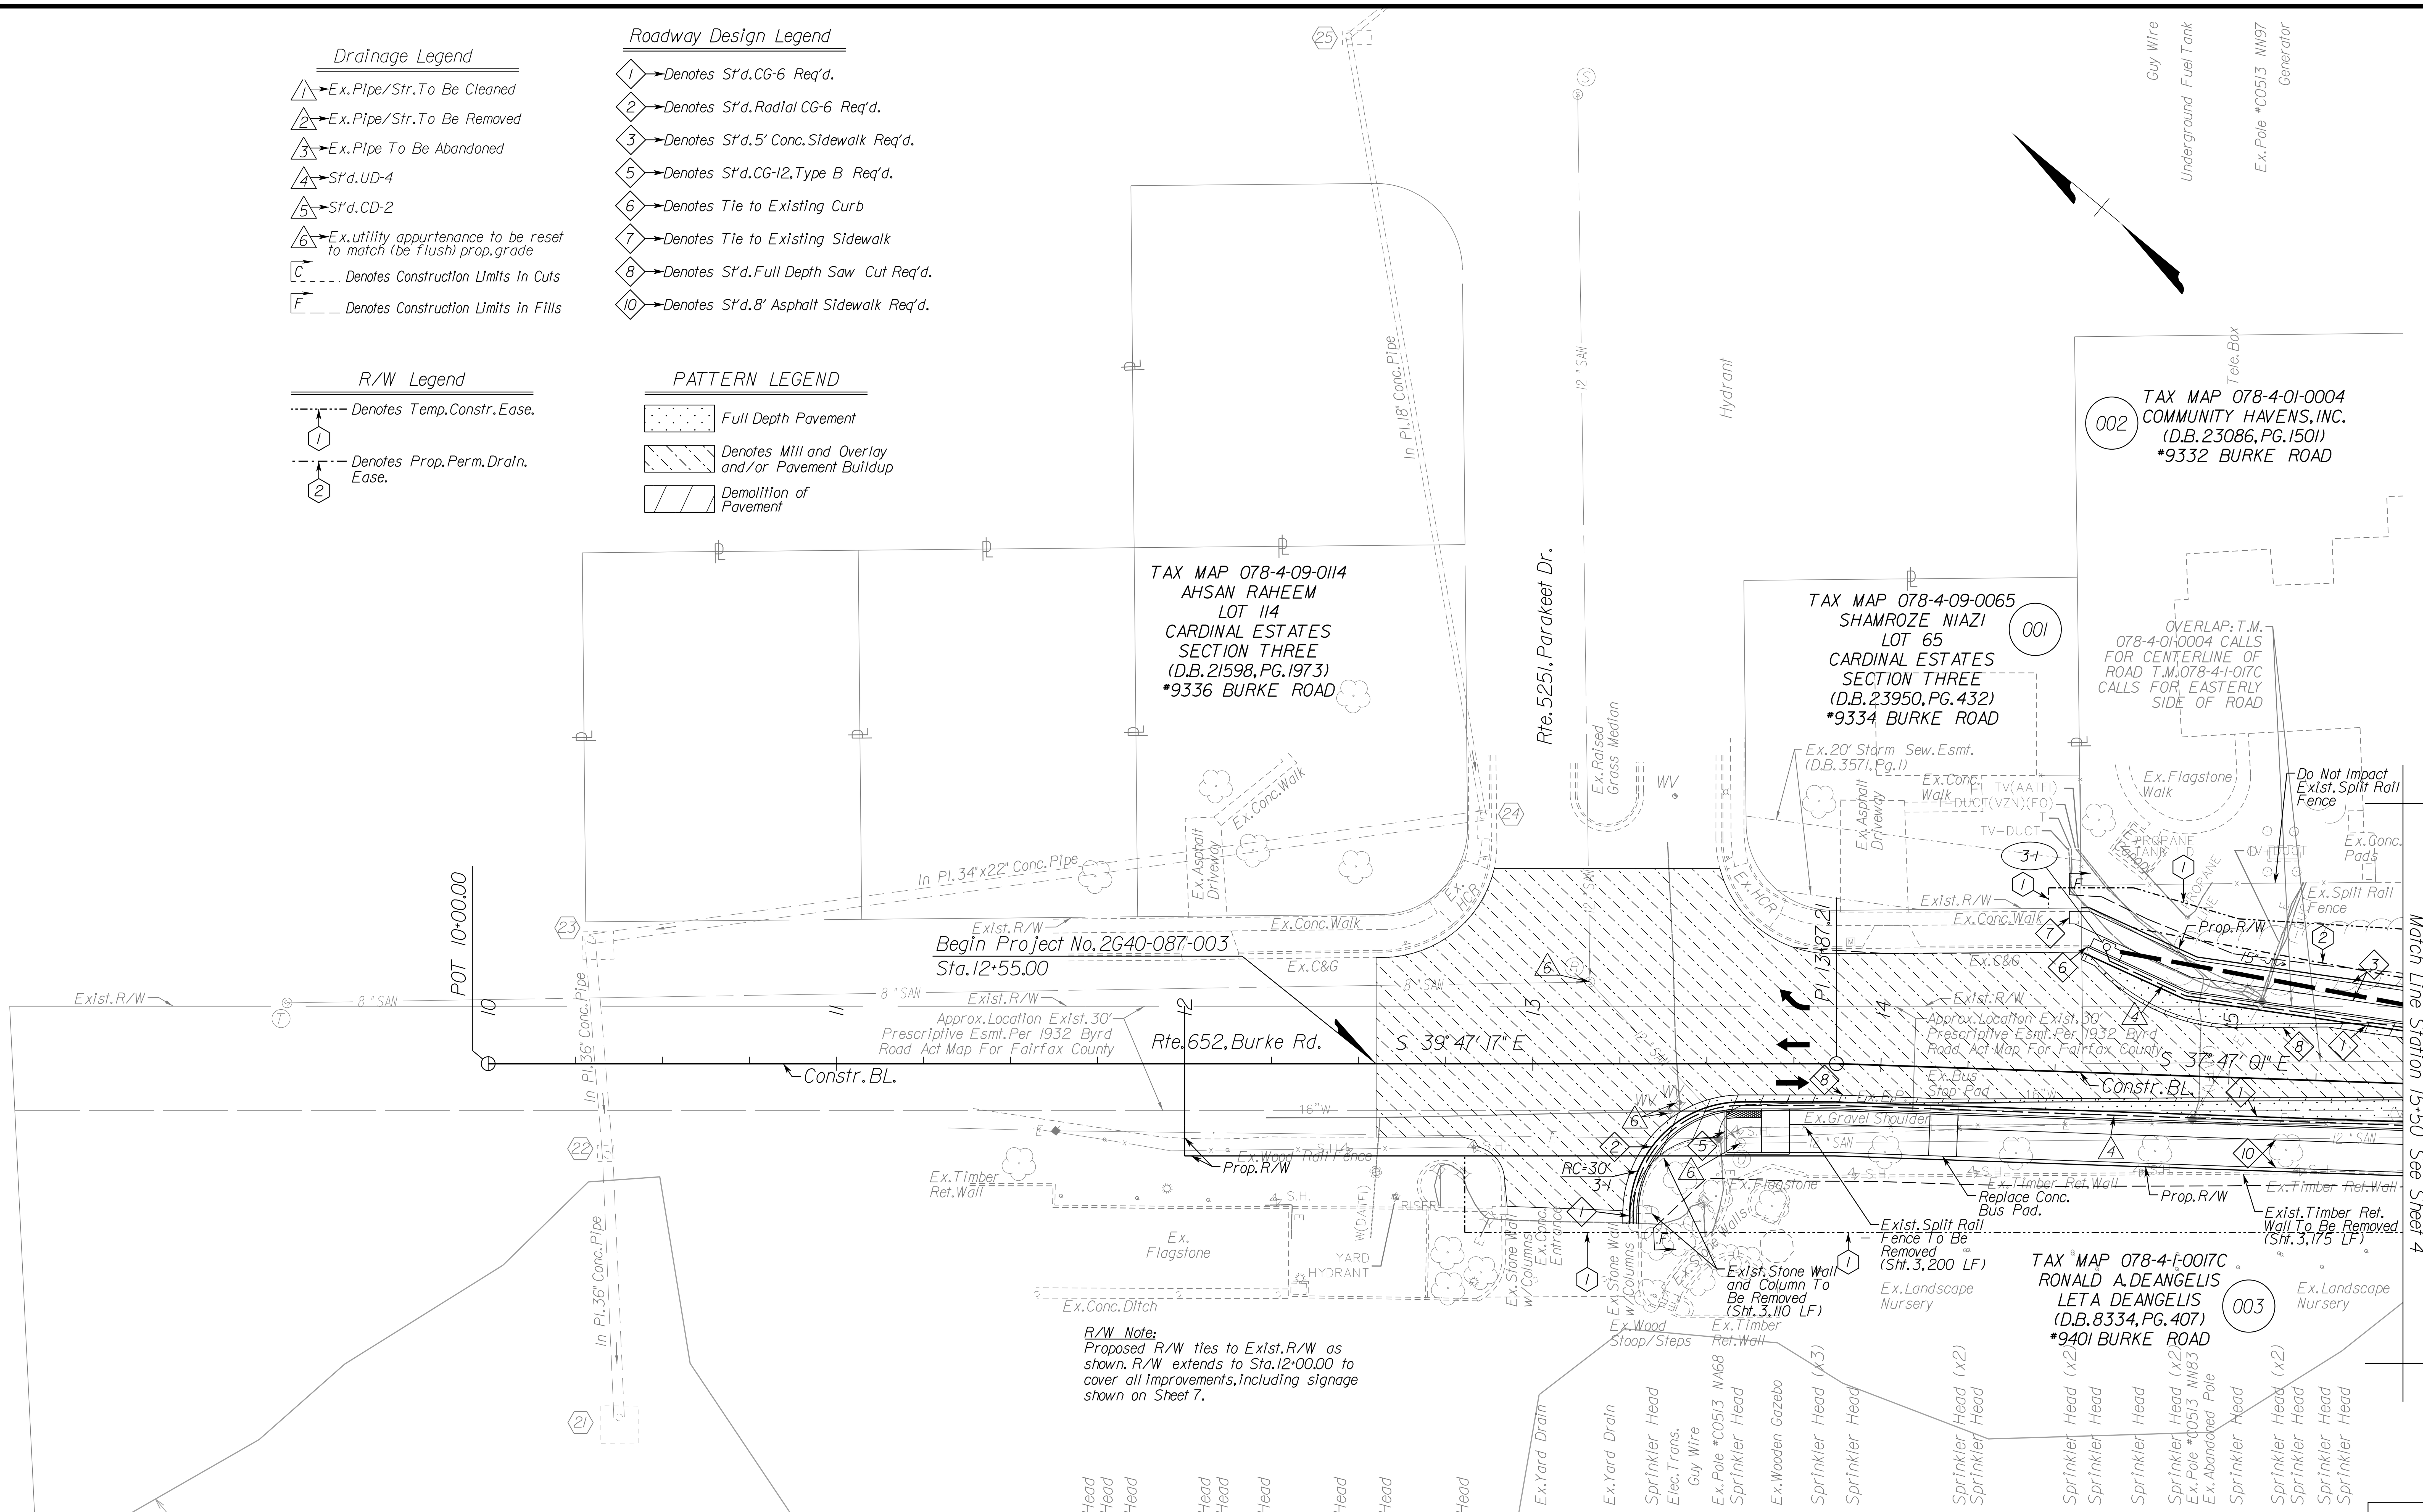

R/W Note:
Proposed R/W ties to Exist.R/W as shown. R/W extends to Sta.12+00.00 to cover all improvements,including signage shown on Sheet 7.

SCALE 0 25' 50'

REFERENCES
(PROFILES,DETAIL & DRAINAGE DESCRIPTION SHEETS,ETC.)

Survey Control Data	1F thru 1F(1)
Construction Alignment Data	1G
Geometric Data	1G(1) thru 1G(4)
Radial Offsets & Bullet Nose Data	1G(5)
Curb Return Profiles	1G(6)
Typical Sections	2A thru 2A(1)
E&S Plans	2D thru 2F(1)
Ditch Typical Section	2J(1)
Ex.Drain.Descr.	2K
Prop.Drain.Descr.	2K(1)
Storm Profiles	2K(2) thru 2K(4)
Profile	3A
Signage Plan	7 Series
Pavement Marking Plan	8 Series

COMMONWEALTH OF VIRGINIA
ADAM D. WELSCHENBACH
Lic. No. 044359
PROFESSIONAL ENGINEER

Rinker Design Associates, P.C.
Manassas, Virginia
PROFESSIONAL ENGINEER

TAX MAP 78-4

EMERGENCY POLICE - FIRE - RESCUE 911

FAIRFAX COUNTY, VIRGINIA
DEPT. OF PUBLIC WORKS & ENVIRONMENTAL SERVICES - UTILITIES DESIGN & CONSTRUCTION DIVISION
12000 GOVERNMENT CENTER PARKWAY, SUITE 463 FAIRFAX, VA., 22035-0052

REVISIONS △#	DESCRIPTION	BY	APPROVED	DATE

OFFICE OF CAPITAL FACILITIES
703-324-5800

BURKE ROAD (ROUTE 652)
PLAN SHEET (STA. 10+00 TO 15+50)
SPRINGFIELD DISTRICT,FAIRFAX COUNTY,VIRGINIA

CONTRACT NO.CN___ PROJECT NO. 2G40-087-003

SCALE		SHEET
HORIZ= 1":25' VERT= N/A	DESIGNED BY: CMW DRAFTED BY: BAM,JRB CHECKED BY: ADW	3

FUND# 300-C30050

7/30/2019